



Electronic Training Equipment & Breadboard / Accessories



Digital-Analog Training System ETS-7000

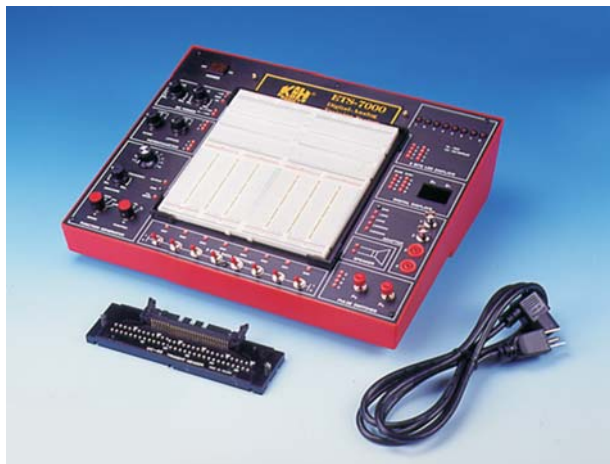


Reserve Fixed Holder
It's available for various connectors.




Expansion Features
It can perform computer interface experiments by matching universal connector.

Specifications

- Solderless breadboard : AD-222**
Interconnected with 2712 tie points nickel plated contact, fits all components with DIP sizes and solid wire AWG #22-30(0.3 ~ 0.8mm). It can be changed and replaced for different purpose and can be connected with demonstration panel. Therefore, it is very convenient for both teachers and students.
- DC power supply :**
 - (1) Fixed DC output : +5V, 1A.
 - (2) Fixed DC output : -5V, 300mA.
 - (3) Variable DC output : 0V ~ +15V, 500mA.
 - (4) Variable DC output : 0V ~ -15V, 500mA.
- Potentiometers :**
 - (1) Variable resistor VR1 = 1 K Ω (B)
 - (2) Variable resistor VR2 = 100K Ω (B)
- Function generator**
 - (1) Frequency ranges : 1 Hz ~ 10 Hz
10 Hz ~ 100 Hz
100 Hz ~ 1 K Hz
1K Hz ~ 10K Hz
10K Hz ~ 100K Hz
 - (2) Amplitude Sine wave output : 0 ~ 8Vpp variable
Triangle wave output : 0 ~ 6Vpp variable
Square wave output : 0 ~ 8Vpp variable
TTL mode output : 0 ~ +5V
- Eight bits data switches :**
When toggle switch is set at "down" position, the output is LO level; on the contrary, it will be HI level while setting at "up" position.
- Speaker :**
2½ inch diameter, 8 Ω /0.25W to be used for load
- Four channel adaptor :**
Both the two banana sockets' and two BNC jacks' point tips are changeable. They are suitable to connect ETS-7000 with peripherals.
- Two digits of segment LED display :**
 - Output display
 - Numerical designs and resultant displays



Segment Identification



• Truth tables

Decimal or Function	Inputs				Outputs						
	D	C	B	A	a	b	c	d	e	f	g
0	L	L	L	L	H	H	H	H	H	H	L
1	L	L	L	H	L	H	H	L	L	L	L
2	L	L	H	L	H	H	L	H	H	L	H
3	L	L	H	H	H	H	H	H	L	L	H
4	L	H	L	L	L	H	H	L	L	H	H
5	L	H	L	H	H	L	H	H	L	H	H
6	L	H	H	L	L	L	H	H	H	H	H
7	L	H	H	H	H	H	H	L	L	L	L
8	H	L	L	L	H	H	H	H	H	H	H
9	H	L	L	H	H	H	H	L	L	H	H
10	H	L	H	L	L	L	L	L	L	L	L
11	H	L	H	H	L	L	L	L	L	L	L
12	H	H	L	L	L	L	L	L	L	L	L
13	H	H	L	H	L	L	L	L	L	L	L
14	H	H	H	L	L	L	L	L	L	L	L
15	H	H	H	H	L	L	L	L	L	L	L

- Two pulse switch (with 2 sets of output: A, \bar{A} , B, \bar{B}):
2 pcs of push-buttons contain switches debouncer for eliminating the bounce caused by switch from "open" to "close" or from "close" to "open" position.
- 8 bits LED display:
Eight red LED's separate input terminals. The LED will be lighted up when input is at "HI level", and it will be turned off when it is at no input or at "LO level".
- Universal connector fixed holder:
It reserves universal connector fixed holder on the panel in order to be connected with various universal connectors as follows :
Standard accessory :
UC-03 Straight header 60pin
Optional accessories :
UC-01 : Card edge connector 2.54 mm 62pin
UC-02 : RS-232 connector 25pin D sub connector, male & female
UC-04 : Card edge connector 3.96 mm 56pin
- Other standard accessories:
 - Power cord
 - Pin : 6pcs
 - User manual
- Dimensions : 325 x 250 x 95 mm (L x W x H)
- Weight : 4.3kg